


ROLLERS STANDS



STD. 2 AXIS POSITIONER

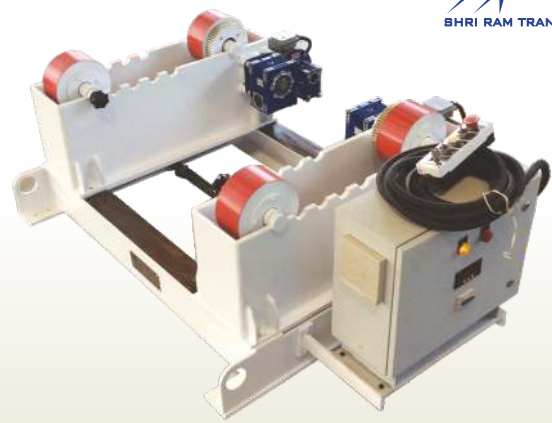

Model	Capacity		Ecc.	C.G.	Rotation Speed	Tilting Speed	Rotational Torque	Tilting Torque	Tilt Angle	Table Diameter
	Kg	Ton								
SRT-WP25	25	0.025	20	25	0.2 - 2	NA	6	NA	90	250
SRT-WP50	50	0.05	25	30	0.2 - 2	NA	15	NA	90	300
SRT-WP100	100	0.1	40	50	0.2 - 2	NA	47	NA	90	500
SRT-WP150	150	0.15	40	50	0.2 - 2	0.2	71	221	90	500
SRT-WP250	250	0.25	40	50	0.2 - 2	0.2	118	368	90	500
SRT-WP500	500	0.5	80	100	0.2 - 2	0.2	471	1349	135	750
SRT-WP1000	1000	1	100	125	0.1 - 1	0.2	1177	2943	135	1000
SRT-WP1500	1500	1.5	100	125	0.1 - 1	0.2	1766	4415	135	1250
SRT-WP2000	2000	2	150	200	0.08 - 0.8	0.2	3532	8829	135	1500
SRT-WP3000	3000	3	150	200	0.08 - 0.8	0.2	5297	13244	135	1500
SRT-WP5000	5000	5	200	300	0.08 - 0.8	0.2	11772	26978	135	1500
SRT-WP10000	10000	10	200	400	0.05 - 0.5	0.2	23544	71123	135	3000
SRT-WP15000	15000	15	200	500	0.05 - 0.5	0.1	35316	121399	135	3200
SRT-WP20000	20000	20	200	600	0.05 - 0.5	0.1	47088	181485	135	3500
SRT-WP50000	50000	50	200	800	0.05 - 0.5	0.1	117720	551813	135	3500

NOTES :

- Custom Built Welding positioner/Turn Table can also be provided apart from the standards.
- We reserve the right to modify the dimensions & others as per new design developments.

OPTIONAL ACCESSORIES :

- Square/Rectangular face plate.
- Servo drive for robotic application.
- Gas purging bore at spindle for TIG welding applications.